

# CD LINEAR 50W

## OUTDOOR LINEAR WALL WASHER

50W

### DESCRIPTION

The CD Linear WW is an assymmetric linear DMX-controlled luminaire available in white or RGBW colour-changing, specifically designed to evenly illuminate light walls and facades.

### FEATURES

- 3-year Warranty
- Cree LEDs
- DMX512 Auto-addressing
- 24VDC Constant Voltage 50W per metre
- Protected against hot-plugging and reverse connection
- Available in six lengths - 300mm, 500mm, 600mm, 900mm, 1000mm, 1200mm
- Available in four beam angles - 15°x35°, 10°x30°, 10°x60°, 30°x60°
- CE/ROHS Certified
- IP67



RGBW



White



RGBW 4IN-1

ORDERING CODE <sup>1</sup>	DESCRIPTION	POWER WATTAGE p/m	DMX CHANNELS	LUMEN OUTPUT lm/m
SCW721003601-27-XX-YY	CD LINEAR WHITE 2700K IP67	50	1	5750
SCW721003601-30-XX-YY	CD LINEAR WHITE 3000K IP67	50	1	6000
SCW721003601-40-XX-YY	CD LINEAR WHITE 4000K IP67	50	1	6250
SCW721003601-65-XX-YY	CD LINEAR WHITE 6500K IP67	50	1	TBC
SCW721003604-XX-YY	CD LINEAR RGBW IP67	50	4	2700

<sup>1</sup> Ordering codes:

XX = Length mm (300 = 300mm, 500 = 500mm, 600 = 600mm, 900 = 900mm, 1000 = 1000mm, 1200 = 1200mm)

YY = Beam Angle (1535 = 15° x 35°, 1030 = 10° x 30°, 1060 = 10° x 60°, 3060 = 30° x 60°)

Specifications subject to change without notice. Revised 11 Oct 2017.



[www.spacecannon.com.au](http://www.spacecannon.com.au)


# CD LINEAR 50W

50W

## OUTDOOR LINEAR WALL WASHER

### DIMENSIONS

All dimensions in millimetres unless otherwise specified

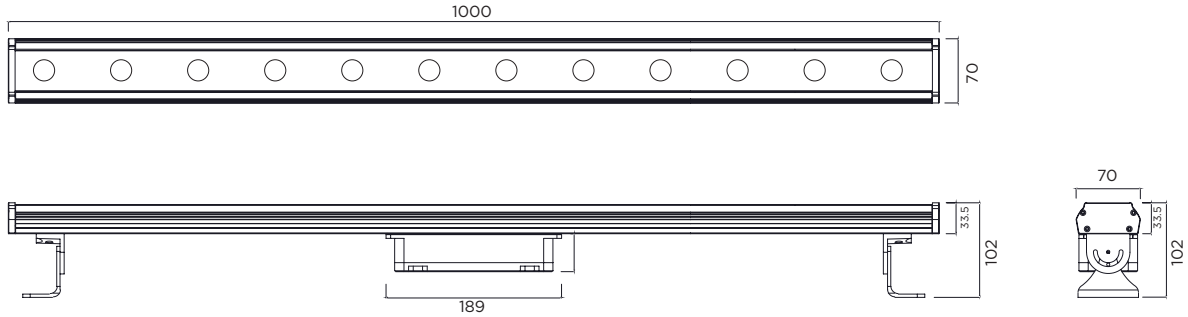

### ACCESSORIES

#### Feeder Cable



#### Power Injector Cable (DMX pass-through)



IP  
67



[www.spacecannon.com.au](http://www.spacecannon.com.au)