

ELLE

DYNAMIC OUTDOOR LED FLOODLIGHT

40W

108W

DESCRIPTION

The Elle is an ultra high-output compact LED floodlight designed for architectural feature and general lighting applications.

FEATURES

Collimators High precision optics available in narrow, medium, wide, and elliptical angles to suit every application.

Lens Transparent, weatherproof, and shock-resistant.

Housing Anodised aluminium.

Cable Separate UV-stabilised power and data cables.

Adjustable Bracket Allows the mounting of the luminaire in any working position.



IP
66



ELLE

DYNAMIC OUTDOOR LED FLOODLIGHT

40W

108W

SPECIFICATIONS

Housing

Anodised aluminium

Ingress Protection

IP65

Control

DMX512, RDM
(Remote Device Management)
Onboard thermal management
with RDM monitoring and
current (brightness) reduction
in the event of overheating.

LEDs

CREE
Elle 20: 24 LEDs
Elle 40: 48 LEDs
Elle 60: 72 LEDs

LED Optics

Specify at time of order:
10°, 30°, 10° x 60°, 90°, 110°.

LED Colours

Single colour:
Red, Green, Blue, Amber, Cool
White, Warm White.
Also available in variable white
and variable colour (RGBA).

Power

180-260VAC 50/60Hz single
phase
Elle 20: 40W
Elle 40: 72W
Elle 60: 108W


Accessories

Stainless steel mounting
brackets

Accessories not included

DMX controller

DIMENSIONS

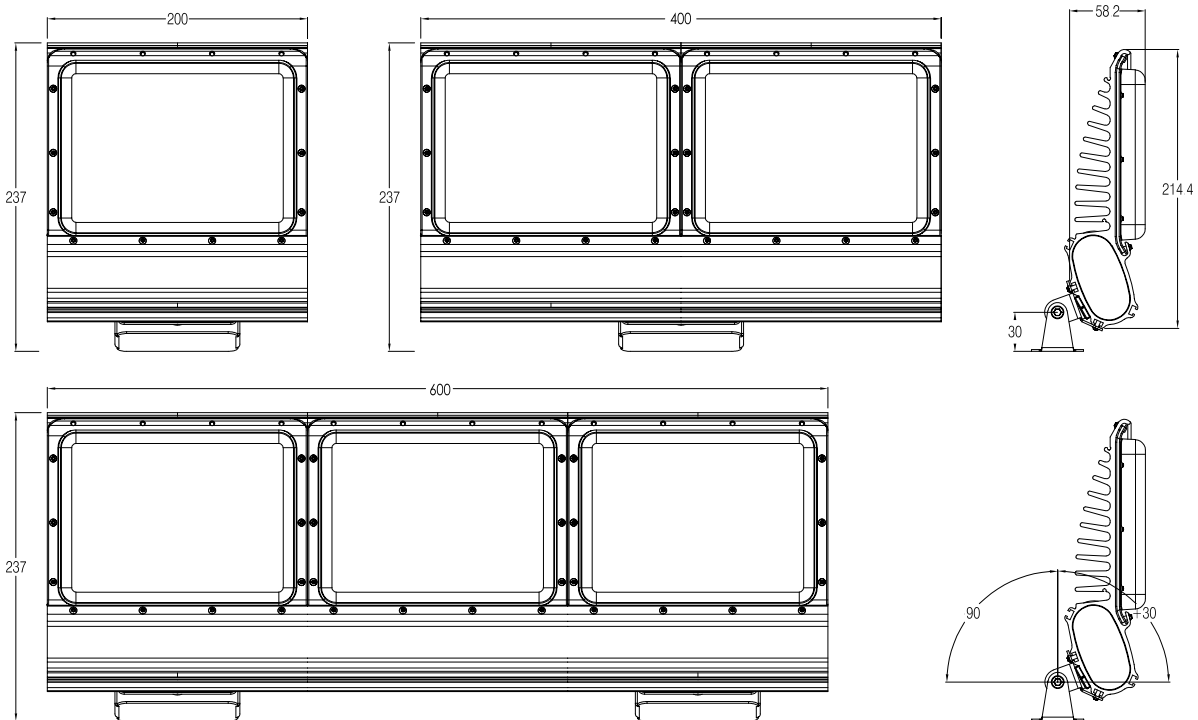

www.spacecannon.com.au